

The Evolution of Shade









Trusted for over 25 years




Hand-built in New Zealand



Marine Grade

Patented & Trademarked Technology

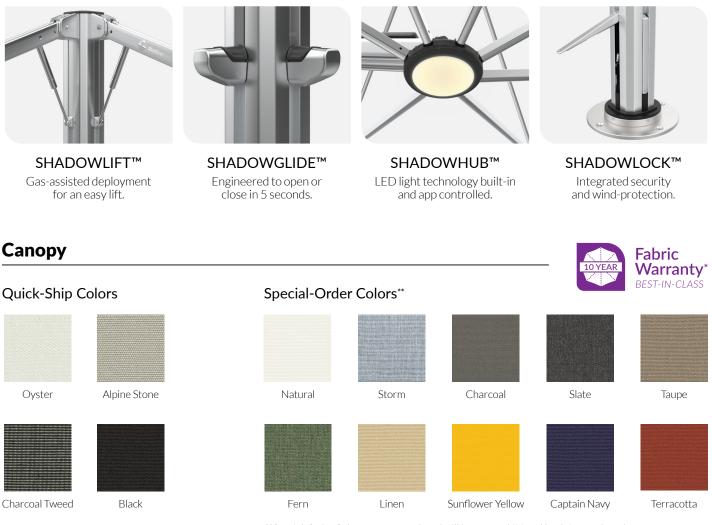

**Special-Order Colors are non-stock and will incur an additional lead time and surcharge. Full Sunbrella Marine Range or other identical fabrics are available as a custom color option.



RECASENS

BCN **TI** 1886

Solution Dyed Acrylic

Some fabric dying methods only coat the outer surface of the fiber - think of a radish.

With the Solution Dyed method, each individual thread fiber is dyed - think of a beetroot. The fabric is also easy to clean and covered by a 10 year warranty.

Frame Color





Heron Black***

***Available in 10' Square or 13' Octagon sizes only.







Mold and lildew Resistant



Oil and Stair

Repellent

Solution-dyed,



UV and Fade Resistant



Clear











ЩΠ

Weave



Chlorin Resistant

Tea Resistant



Protection



Water

Resistant









Size & Configuration

OCTAGON UNO

11' | 3.5m or 13' | 4.0m




SQUARE UNO 8' | 2.5m or 10' | 3.0m



SQUARE DUO 16' | 5.0m or 20' | 6.0m

OCTAGON DUO


22' | 7.0m or 26' | 8.0m




SQUARE TRIO

16' | 5.0m or 20' | 6.0m

SQUARE DUO 16' | 5.0m or 20' | 6.0m



SQUARE QUATTRO 16' | 5.0m or 20' | 6.0m



All sizings and conversions are approximate and subject to change without notice. Refer to specsheets for exact, up-to-date measurements.

Mounting Options

SURFACE PLATE

For deck, patio and concrete mounting. (316 stainless steel)



IN-GROUND ANCHOR

For mounting with a concrete footing.



Note: Fastenings are not supplied for the Surface Plate or Wall Mount Bracket.


Features



EASY OPEN & CLOSE Umbrella deployment system with no winding or cables.



MARINE GRADE No-rust, 316 Stainless Steel Spigot.



FOLLOW THE SUN Enjoy the 360° rotation for all-day-shade.



BEST-IN-CLASS WARRANTY

Accessories

N.b. Accessories are optional. Pricing additional.



RAIN GUTTER Connects adjoining canopies to enhance rain protection.



LED LIGHT CONTROL Power your light with the Smart Battery or Hardwire Kit.



PROTECTION COVER Recommended protection for your umbrella when not in use.



CASTOR WHEELS FOR FREE-STANDING BASE

WALL MOUNT BRACKET

For when ground mounting isn't possible. (316 stainless steel)



FREE-STANDING BASE + ALUMINUM BASE COVER


> For complete customized manoeuvrability.



Available in Space Grey or Heron Black. Concrete pavers (not included) are required for ballast. Optional Castor Wheels available.



Dimensions

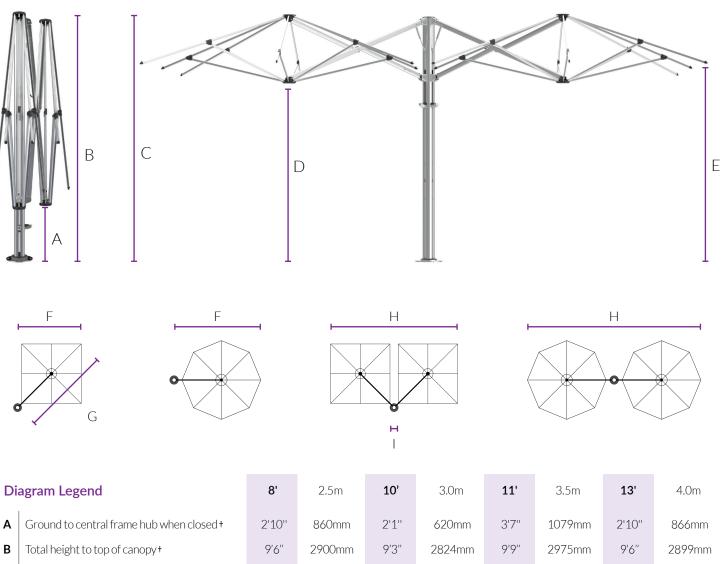

с	Height of umbrella to top of mast cap +	9'6''	2908mm	9'6"	2908mm	9'7"	2908mm	9'6"	2908mm
D	Ground to central frame hub when open †	7'0''	2130mm	6'9''	2054mm	7'3''	2205mm	7'0''	2128mm
Е	Ground to lower outer edge of canopy+	7'3''	2222mm	7'3''	2219mm	7'4''	2237mm	7'2''	2172mm
F	Centre of Spigot to outside edge of canopy	8'8''	2646mm	9'10''	2973mm	11'4"	3447mm	12'10''	3923mm
G	Diagonal from centre of mast to corner	12'3''	3742mm	13'10''	4205mm	N/A	N/A	N/A	N/A
н	Duo/Quattro umbrella width edge to edge	17'4''	5292mm	19'6''	5946mm	22'7''	6894mm	25'9''	7846mm
I	Gutter space between canopies	6"	160mm	6"	160mm	N/A	N/A	N/A	N/A

⁺Free-Standing Base installations will add 6" | 165mm to the height and surface plates will add 1/2" | 12mm to the height. Adding the optional Castor Wheels to the Free-standing Base will increase height a further 2-3" | 45-80mm to the height. All sizings and conversions are approximate and subject to change without notice. Refer to specsheets for exact, up-to-date measurements.

